

CE



OTT100H

Triple technology detector for outdoor use
Installation and programming manual



GameOver

inim[®]
ELECTRONICS

Table of contents

1	General information	3
1-1	About this manual	3
1-2	Manufacturer's details	3
1-3	Description of the product	3
1-4	Package contents	5
2	Functioning	6
2-1	Detection range	6
2-2	Operating principles	6
2-3	"Antimasking" function	7
2-4	LEDs enabling	8
3	Installation	8
3-1	Placement	8
3-2	Mounting	8
4	Programming	9
5	Trouble shooting	10
6	Maintenance and periodic checks	10
7	Disposal and scrapping	10
	Simplified EU Declaration of Conformity	11

The information contained in this document is the sole property of INIM Electronics s.r.l. No part may be copied without written authorization from INIM Electronics s.r.l.

All rights reserved.

Copyright

Informative notice regarding the disposal of electrical and electronic equipment (applicable in countries with differentiated waste collection systems)

The crossed-out bin symbol on the equipment or on its packaging indicates that the product must be disposed of correctly at the end of its working life and should never be disposed of together with general household waste.

The user, therefore, must take the equipment that has reached the end of its working life to the appropriate civic amenities site designated to the differentiated collection of electrical and electronic waste.

As an alternative to the autonomous-management of electrical and electronic waste, you can hand over the equipment you wish to dispose of to a dealer when purchasing new equipment of the same type. You are also entitled to convey for disposal small electronic-waste products with dimensions of less than 25cm to the premises of electronic retail outlets with sales areas of at least 400m², free of charge and without any obligation to buy.

Appropriate differentiated waste collection for the subsequent recycling of the discarded equipment, its treatment and its environmentally compatible disposal helps to avoid possible negative effects on the environment and on health and favours the re-use and/or recycling of the materials it is made of.

WEEE



GENERAL INFORMATION

1

About this manual **1-1**

Triple technology detector for outdoor use (IN01) installation manual	DESCRIPTION
DCMIIINIEOTT100H	MANUAL CODE
1.30	VERSION

Manufacturer's details **1-2**

Manufacturer: INIM ELECTRONICS S.R.L.
Production plant: Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), Italy
Tel.: +39 0735 705007
Fax: +39 0735 704912
e-mail: info@inim.biz
Web: www.inim.biz

The persons authorized by the manufacturer to repair or replace the parts of this system, hold authorization to work on INIM Electronics brand devices only.

Description of the product **1-3**

- Triple technology detector for outdoor use
- Two PIR and one microwave (MW) programmable sensors
- MW frequency 24GHz
- Low consumption infrared sensors double element with UV filter
- Programmable infrared sensitivity
- Low PIR beam precision adjustment (patented system)
- AND/OR selectable function
- Mechanism for horizontal coverage adjustment
- UV rays resistant Fresnel lens
- UV resistant polycarbonate case
- Stainless steel wall fixing bracket
- Stainless steel pole fixing brackets (available on request)
- 4 signalling LEDs
- Active infrared anti-masking (two pairs protection for each lens portion)
- Anti solar blinding through mechanical with high efficiency filters
- "Test" function to signalling each alarm by LED blinking; auto power off after 4 minutes
- Anti-tamper and anti-dislodgement system

Table 1: OTT100H technical features

Power-supply	from 9 to 15 V---
Maximum current	20mA
Microwave frequency	K band
Maximum RF output power	<17 mW e.i.r.p. (12.31 dBm)
Detection range	from 3 to 18m
Horizontal coverage angle	85°
Horizontal coverage adjustment	+/- 45°
Alarm, masking contacts	MOS FET relay 100 mA 35 V, 2 Ohm max.
Alarm time	1 s
Antimasking	2 levels active IR
IP protection degree	IP44
Security grade	3
Environmental class	IV
Working temperature	from -25° to 55°C
Dimensions	189x81x70 mm
Weight (with wall fixing bracket)	370g

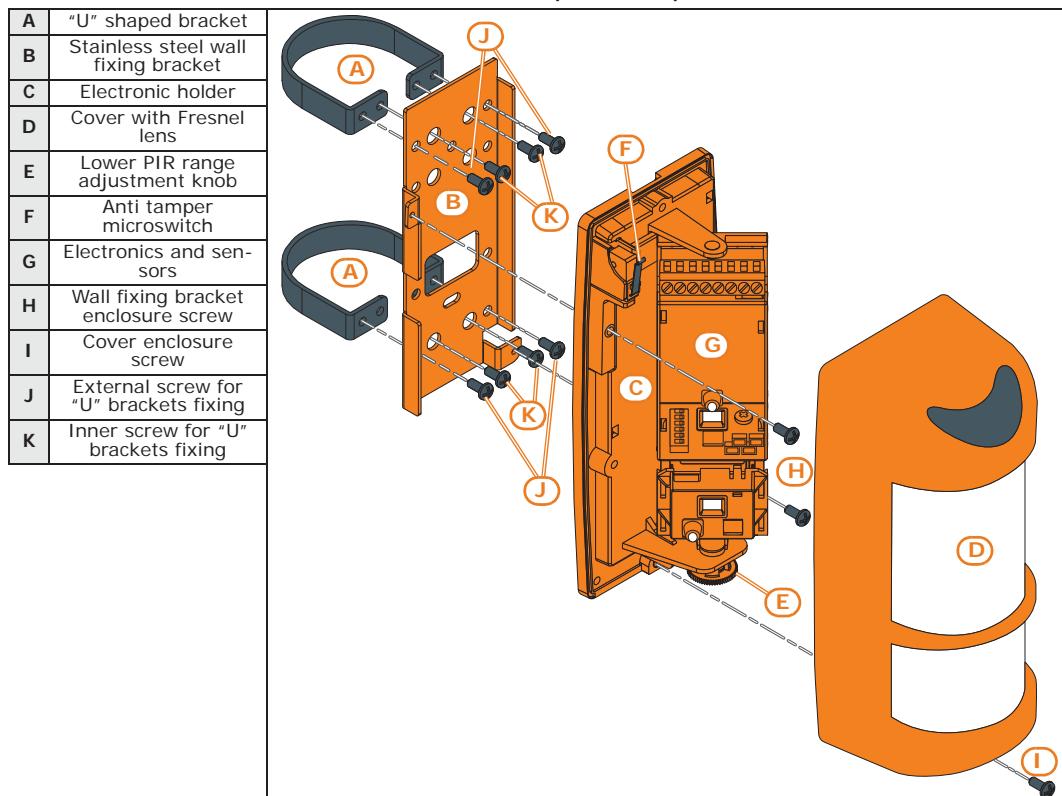
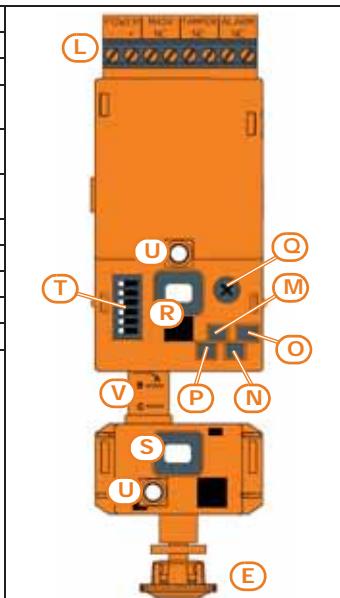
Table 2: Mechanical parts description

Table 3: Electronic part description

L	Terminal board for wire connection
M	Red LED 1 for general alarm
N	Yellow LED 2 for MW
O	Green LED 3 for higher PIR detection
P	Green LED 4 for lower PIR detection
Q	Microwave sensitivity adjustment trimmer
R	Higher infrared sensor (PIR 1)
S	Lower infrared sensor (PIR 2)
T	DIP switches
U	Anti-masking LED
V	PIR 2 marked positions

**Table 4: Terminal board**

POWER	+	Power supply 12 V---	
	-	(from 10 to 15 V)	
MASK	NC	Anti-mask output	
TAMPER	NC	24 h anti tamper output	Normally closed contact in standby
ALARM	NC	Alarm output	

Package contents 1-4

Inside the package you will find:

- OTT100H detector
- Stainless steel wall fixing bracket
- Installing manual (this)
- Plastic bag containing:
 - 2 stainless steel metric screw M3 x 8
 - 2 anchor screws and plugs for wall mounting


"U" shaped brackets are not included in the package (accessory items to be purchased separately).

FUNCTIONING

2

Detection range 2-1

Table 5: Top view

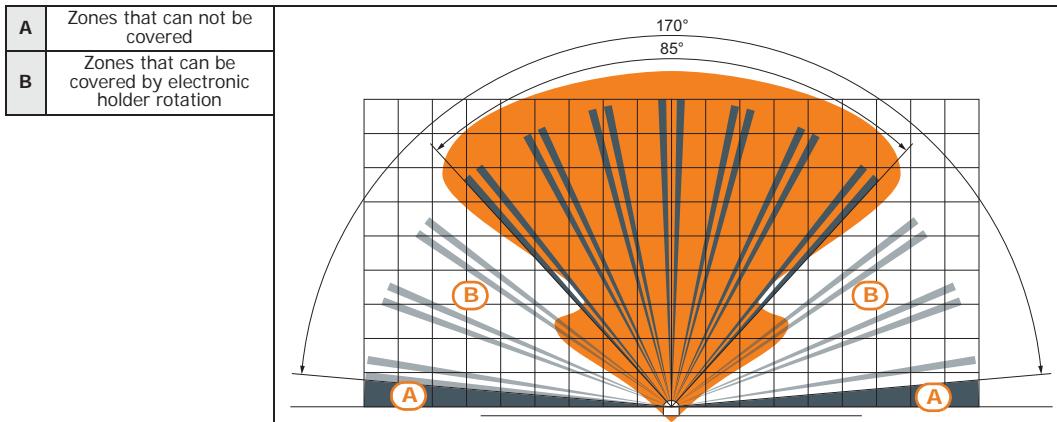


Use the trimmer "MW" (table 3, Q) to adjust the microwave sensitivity (the sensitivity is increased turning it clockwise). **ADJUSTMENT**

Adjust the microwave sensibility in relationship to the needed detection range.

By using the knob (table 2, F) it is possible to move the PIR2 (lower) in order to obtain different ranges from 3m to 18m.

The knob moves vertically the RIP along the marked positions on the holder (table 3, V). Each position corresponds to a distance:

Table 6: Side view

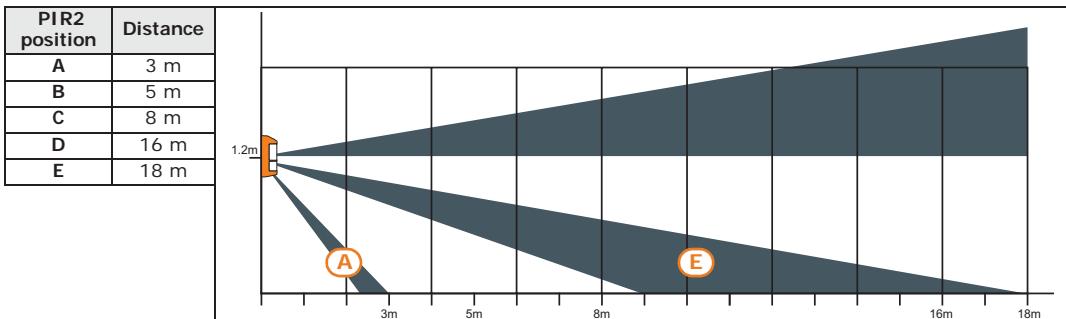

These distances are reached when the detector is installed at about 120cm (height).



If the object in motion is very large (for example a car) there is possibility that the detector can detect its presence even if it's farther than 18 m.

Operating principles 2-2

The detector works on the combined action of two PIRs and a microwave sensors.

The figures below shows some of most relevant working examples.

Table 7: Working examples

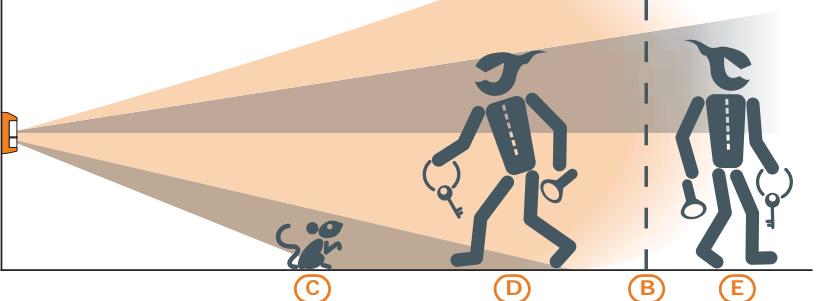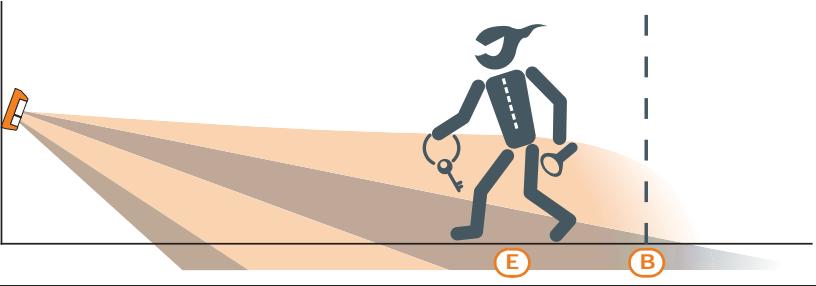		
A	Detector	
B	Protected area limit	
C	The pet is detected only by two of the three sensors (lower PIR and MW).	No alarm
D	The person is detected by all three sensors (upper PIR, lower PIR, MW).	Alarm
E	The person is detected by two sensors (upper PIR and MW).	No alarm
		
F	If the detector is installed on a tilted wall, or pole, the detection range will be reduced. Both, upward as downward.	Uncorrected installation No alarm

“Antimasking” function

2-3

The detector is equipped with an active IR anti-masking function to protect the PIR. It emits a tampering signal within 3 minutes. The output of this function is the **MASK** terminal block.

In a standard configuration, this terminal block can be connected to a 24h active line or to a control unit input appropriately programmed to send fault messages. When the detector identifies a masking attempt, the four LEDs flash simultaneously until the masking condition is resolved.

To enable the correct operation of the masking detection system (Anti-masking), allow the detector to study and analyse the environmental conditions of the area to be protected. This procedure is mandatory to guarantee the correct operation of the anti-masking channel.

Anti-masking sensitivity can be adjusted through the DIP switch 5 (*table 3, T*):

- “OFF”, low sensitivity
- “ON”, high sensitivity

Follow the procedure below:

1. Make the connections to the detector terminal box, leaving the DIP switch 5 set to OFF.
2. Once powered, close the cover and run all the detection tests required.
3. Open the cover and set the anti-masking sensitivity via the DIP switch 5.
4. Close the cover immediately (maximum within 10 seconds).
5. Stay at least 1 meter from the front part of the detector for at least 4 minutes.

LEDs enabling 2-4

LED signalling activations can be enabled via the DIP switch 6 (*table 3, 7*):

- OFF set - LEDs enabled
- ON set - LED disabled

INSTALLATION 3

- The wall does not have any pronounced depressions or protrusions.
- Install the detector on rigid surfaces, free of vibrations.
- Avoid to fix the detectors near to heat sources or at direct sunlight.
- Avoid electromagnetic energy reflection on wide surfaces such as mirrors, metal walls, etc.
- Avoid to fix the detector in front of fluorescent lamps or in proximity of them.
- Connections shielded cable is suggested and one cable per detector is preferred.
- Separate the alarm system cables from the mains cables.

WARNING

- The detector can be installed outdoors (according to the Class IV EN 50131-1).
- Avoid to direct the detector towards moving objects or, if impossible, please take care in adjusting the detector in order to avoid false alarms.
 - Be sure to install the cover with Fresnel lens before the detector testing. Without cover, the detector doesn't work.

Placement 3-1

Environmental conditions are important elements to be evaluated during the installation. Bump, bottomland or slopes can modify the performances of the detector.

If into the detection area any medium size animal can walk, it is suggested to choose carefully the installation height in order to avoid false alarms.

Installation height must be between 1 m and 1.30 m (not tilted ground).

The maximum coverage range, 18m, is reached when the detector is installed at about 120cm (height).

Note

Do not obscure partially or completely the detector's field of view.

Once the detector has been powered, wait 3-4 minutes before running the coverage test (the IR sensors need to be stabilised).

COVERAGE TESTS

In order to obtain a real simulation, free the protected area, preventing more people from moving inside the same area.

After 30-40 seconds of quiet, try to access the detection area by moving perpendicularly to the beams, thus avoiding a frontal approach.

Check the operation of the two PIRs with the two green LEDs and the operation of the microwave with the yellow LED.

Run the operation test, making sure to break the IR beams (*table 5 "Top view" e table 6 "Side view"*) by moving perpendicularly to them.

Once detection has been achieved, wait for at least 7-8 seconds before trying to be detected again.

Mounting 3-2

1. Unscrew the screw for the cover enclosure (*table 2, I*).
2. Remove the cover with lens (*table 2, D*).
3. Set up for the steel bracket fixing (*table 2, B*) on the wall, or on a pole (be sure the pole is stable and ripple free).
4. Position the two "U" (*table 2, A*) shaped bracket around the pole.


POLE FIXING

5. Block them with the inner screws (*table 2, K*) and the external screws (*table 2, J*).
4. Perforate the wall in correspondence of the holes on the casing.
5. Insert the wall plugs into the holes.
6. Pull the wires through the wire entry on the steel bracket.
7. Fix the steel bracket on the wall or on the pole.

WALL FIXING

Fix the metallic support on the wall perpendicularly to the ground.

8. Pull the wires trough the entry on the electronic holder (*table 2, C*). Perforate the cable passage knockout using a sharp point tool, as a screwdriver or similar.
9. Screw up the detector on the support using the 2 provided screws (*table 2, H*).
10. Connect the wires to the terminals (*table 3, L*).
11. Run the range settings (PIR 2 position adjustment, MW sensitivity, PIRs sensitivity). See *paragraph 2-1 Detection range*.
12. Close the detector with the front cover with Fresnel lens as shown opposite.
13. Screw up the metric screw (*table 2, I*).

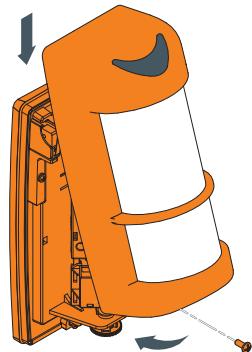Note**4****PROGRAMMING**

In order to make the detector suitable for outdoor applications, a single sensor adjustment system has been implemented.

In the tables below are shown the DIP switch configurations (*table 3, T*):

Table 8: Infrared sensitivity adjustment

DIP 2	DIP 1	
	OFF	ON
	High sensitivity	Medium-high sensitivity
ON	Medium-low sensitivity	Low sensitivity

Table 9: Sensor programming

DIP 4	DIP 3	
	OFF	
	PIR 1 AND PIR 2 AND MW	PIR 1 AND PIR 2
OFF	Alarm output active only when all three technologies detect the presence. It can be used in most outdoor installations.	Alarm output active when both PIRs detect a presence. The MW is not managed. The detection of the MW does not affect the performance of the detector.
	(PIR 1 OR PIR 2) AND MW	PIR 1 AND MW (PIR 2 bypassed)
ON	Output alarm active when the MW and one of the two PIR detect a presence. Not recommended in particularly hostile environments.	Alarm output active when PIR 1 and the MW detect a presence. Not recommended in particularly hostile environments.

If the detector is set in triple AND (DIP 3 and DIP 4 in OFF position) configuration, the maximum distance of detection is the one setted through the Adjustment of the PIR2.

Table 10: Antimasking and LEDs

DIP 5	OFF	ON
	Low anti-masking sensitivity	High anti-masking sensitivity
DIP 6	LEDs enabled	LEDs disabled

TROUBLE SHOOTING**5****Table 11: Possible solutions**

Trouble	Solution
LEDs fail to switch on	Check wiring connection.
	Check the presence of current and if the voltage is between 9.5 and 16 V.
	Make sure that DIP switch 6 is set to OFF.
False alarms	The detector is not perpendicular to the ground.
	Check if the lower detection area is wider than your planning.
	Check if there are objects in movement in the detection area.
	MW adjustment is set at maximum level.
No detection, sometimes	The lower PIR is not properly adjusted.
	MW adjustment is set at minimum level.
Continuous alarms of MASK output	Medium-sized obstacles close to the detector.
	Open the cover, disconnect the detector (wait about 5 seconds), re-power and close the cover immediately (within 10 seconds), go out of range for 4 minutes.
Red LED blinking	Verify that the detector's power supply.

MAINTENANCE AND PERIODIC CHECKS**6**

Keep the lens clean to guarantee proper operation of the detector.

A lens which is not perfectly clean may cause detection problems and/or problems to the anti-mask function.

The cleaning must be done when necessary or when clearly dirty.

Clean the lid and the lens with a cloth dampened with water.

Wipe with a dry cloth.

Do not use chlorine-based or abrasive products or alcohol to remove particularly noticeable dirt.

CLEANING PROCEDURE

ATTENTION!

DISPOSAL AND SCRAPPING**7**

1. Unscrew the screws that fasten the front lid and remove it.
2. Disconnect the detector; disconnect all the terminals on the terminal block.
3. Divide the parts by type and dispose of them in accordance with applicable laws.

DISMANTLING

Do not dispose of the components or any other product material in the environment.

Seek the assistance of companies authorised to dispose of and recycle waste materials.

ATTENTION!

SIMPLIFIED EU DECLARATION OF CONFORMITY

Hereby, INIM ELECTRONICS S.R.L. declares that the radio equipment type OTT100H is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address: www.inim.biz.

BG: С настоящото INIM ELECTRONICS S.R.L. декларира, че този тип радиооборъжение OTT100H е в съответствие с Директива 2014/53/EU.

Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: www.inim.biz.

CS: Tímto INIM ELECTRONICS S.R.L. prohlašuje, že typ rádiového zařízení OTT100H je v souladu se směrnicí 2014/53/EU.

Úplné znění EU vyhlášení o shodě je k dispozici na této internetové adrese: www.inim.biz

DA: Hermed erklærer INIM ELECTRONICS S.R.L., at radioudstyrstypen OTT100H er i overensstemmelse med direktiv 2014/53/EU.

EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: www.inim.biz

DE: Hiermit erklärt INIM ELECTRONICS S.R.L., dass der Funkanlagentyp OTT100H der Richtlinie 2014/53/EU entspricht.

Der vollständige Text der EU-Konformitätsverklärung ist unter der folgenden Internetadresse verfügbar: www.inim.biz

ET: Käesolevaga deklareerib INIM ELECTRONICS S.R.L., et käesolev raadioseadme tüüp OTT100H vastab direktiivi 2014/53/EL nõetele.

ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: www.inim.biz

EL: Με την παρούσα ο/η INIM ELECTRONICS S.R.L., δηλώνει ότι ο ραδιοεξοπλισμός OTT100H πληροί την οδηγία 2014/53/ΕΕ.

To πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: www.inim.biz

ES: Por la presente, INIM ELECTRONICS S.R.L. declara que el tipo de equipo radioeléctrico OTT100H es conforme con la Directiva 2014/53/UE.

El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: www.inim.biz

FI: INIM ELECTRONICS S.R.L. vakuuttaa, että radiolaitetyyppi OTT100H on direktiivin 2014/53/EU mukainen.

EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: www.inim.biz

FR: Le soussigné, INIM ELECTRONICS S.R.L., déclare que l'équipement radioélectrique du type OTT100H est conforme à la directive 2014/53/UE.

Le texte complet de la déclaration UE de conformité est disponible à l'adresse Internet suivante: www.inim.biz

HR: INIM ELECTRONICS S.R.L. ovime izjavljuje da je radijska oprema tipa OTT100H u skladu s Direktivom 2014/53/EU.

Cjeloviti tekst EU izjave o skladnosti dostupan je na sljedećoj internetskoj adresi: www.inim.biz

HU: INIM ELECTRONICS S.R.L. igazolja, hogy a OTT100H típusú rádióberendezés megfelel a 2014/53/EU irányelvnek.

Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen: www.inim.biz

LT: As, INIM ELECTRONICS S.R.L., patvirtinu, kad radio įrenginių tipas OTT100H atitinka Direktyvą 2014/53/ES.

Visas ES atitinkties deklaracijos tekstas prieinamas šiuo interneto adresu: www.inim.biz

LV: Ar šo INIM ELECTRONICS S.R.L. deklarē, ka radioiekārta OTT100H atbilst Direktīvai 2014/53/ES.

Pilns ES atbilstības deklarācijas teksts ir pieejams sādā interneta vietnē: www.inim.biz

MT: B'dan, INIM ELECTRONICS S.R.L., niddikjara li dan it-tip ta' tagħmir tar-radju OTT100H huwa konformi mad-Direttiva 2014/53/UE.

It-test kollu tad-dikjarazzjoni ta' konformità tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li ġej: www.inim.biz

NL: Hierbij verklaar ik, INIM ELECTRONICS S.R.L., dat het type radioapparatuur OTT100H conform is met Richtlijn 2014/53/EU.

De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: www.inim.biz

PL: INIM ELECTRONICS S.R.L. niniejszym oświadcza, że typ urządzenia radiowego OTT100H jest zgodny z dyrektywą 2014/53/UE.

Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: www.inim.biz

PT: O(a) abaixo assinado(a) INIM ELECTRONICS S.R.L. declara que o presente tipo de equipamento de rádio OTT100H está em conformidade com a Diretiva 2014/53/UE.

O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: www.inim.biz

RO: Prin prezenta, INIM ELECTRONICS S.R.L. declară că tipul de echipamente radio OTT100H este în conformitate cu Directiva 2014/53/UE.

Textul integral al declarării UE de conformitate este disponibil la următoarea adresă Internet: www.inim.biz


SK: INIM ELECTRONICS S.R.L. týmto vyhlasuje, že rádiové zariadenie typu OTT100H je v súlade so smernicou 2014/53/EÚ.

Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: www.inim.biz

SL: INIM ELECTRONICS S.R.L. potrjuje, da je tip radijske opreme OTT100H skladen z Direktivo 2014/53/EU.

Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: www.inim.biz

SV: Härmad försäkrar INIM ELECTRONICS S.R.L. att denna typ av radioutrustning OTT100H överensstämmer med direktiv 2014/53/EU. Den fullständiga texten till EU-försäkran om överensstämelse finns på följande webbadress: www.inim.biz

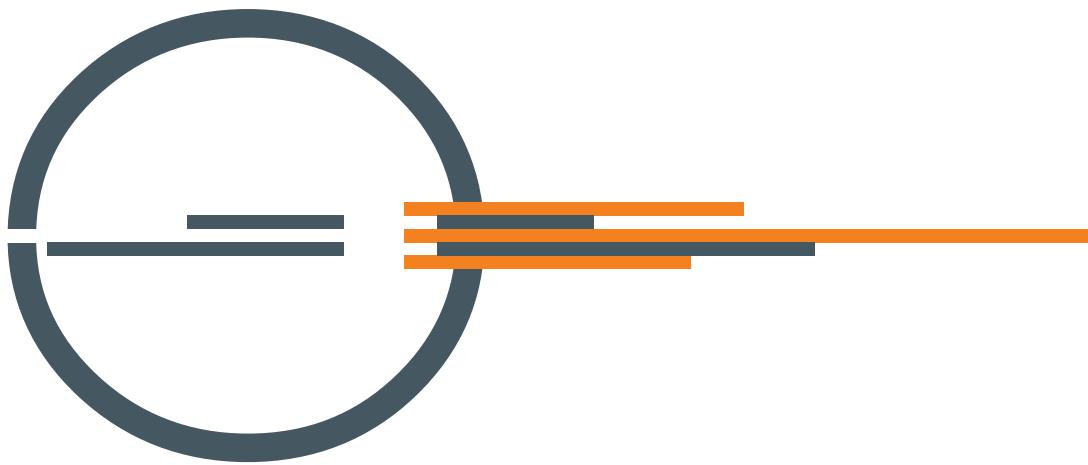

Centobuchi, via Dei Lavoratori 10
63076 Monteprandone (AP) Italy
Tel. +39 0735 705007 _ Fax +39 0735 704912

info@inim.biz _ www.inim.biz