

WAL 165/6 PP


6.5" 6W WALL MOUNT LOUDSPEAKER

The WAL 165/6 PP loudspeaker for voice evacuation systems is a compact rectangular shaped 6W loudspeaker in a wooden casing which, in addition to providing sturdiness to the device, comes in white or, as an option, black enclosure.

On account of its shape, the materials it is made of, its versatility and the 165mm thick enclosure it ensures optimum frequency response, making the acoustic propagation of this device suitable for a wide variety of applications such as hotels, hostels, commercial buildings, hospitals and schools.

The loudspeaker has an IP 21C protection grade; the connection unit has a ceramic (or plastic) terminal block with thermal fuse.

EN54-24 certified.

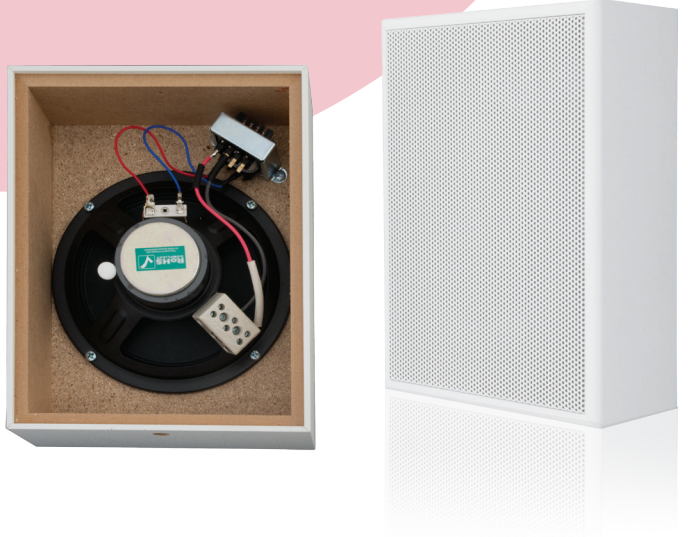

— TECHNICAL SPECIFICATIONS

Main features

- 6.5" speaker
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Wall mounting
- Internal selector to adjust the output power to 6 / 3 / 1.5 / 0.75 W
- White colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified

Electrical specifications



Power (PHC)	6 / 3 / 1.5 / 0.75 W (internal selector)
SPL (Sound Pressure Level)	98.2 dB (1W @ 1m)
Frequency response	140 Hz – 19.700 KHz (-10 dB)
Operating voltage	70 – 100 Vrms

Mechanical specifications

IP protection grade (according to EN54-24 / IP Rating)	21C
Enclosure material	MDF
Dimensions	253 x 193 x 83 mm
Weight	1.8 Kg
Colour	White RAL 9010
Mounting type	Wall mount



Dimensions

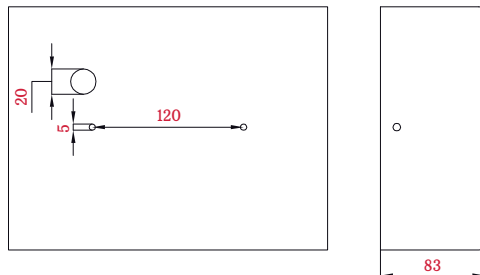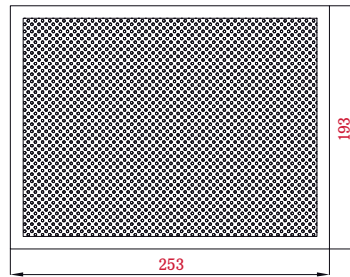

— ORDER CODE

WAL 165/6 PP 6.5" 6W wall mount loudspeaker



Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), ITALY
Tel. +39 0735 705007 _ Fax +39 0735 704912

info@inim.biz _ www.inim.biz

Inim distributor's stamp
and signature