

# Enbeam OM2 Multimode 50/125 4 Core Armoured CST Fibre Optic Cable Loose Tube Eca - Blue

Item Code: 205-275



X Duct Grade rodent resistant

X Sequentially metre marked

X 500/500MHz.km bandwidth

X Cut to length service

X Euroclass Eca

## Product overview

Excel OM2 50/125µm loose tube optical fibre cables have been designed specifically for internal and external applications. These compact, lightweight cables are extremely flexible and are quick and easy to install.

The cables are constructed around a gel filled (non-dripping and silicon free) tube containing up to 24 colour coded 250µm primary coated fibres. This tube is covered with swellable (for the longitudinal water tightness) yarns as strength members.

The cable legend includes Euroclass information as standard for clear classification and traceability on CPR.

## Product specifications

Features	Values
Number of Cores	4
Type of tube	Loose tube
Number of fibres per tube	4
Fibre type	Multi mode 50/125
Category	OM2
Armouring	yes
Rodent resistant	yes
Outer sheath material	Copolymer, thermoplastic (LS0H)
Outer sheath colour	Blue
Reaction-to-fire class according to EN 13501-6	Eca
Halogen free (acc. EN 60754-1/2)	yes
Flame retardant	In accordance with EN 50399

Continued on the next page...


# Enbeam OM2 Multimode 50/125 4 Core Armoured CST Fibre Optic Cable Loose Tube Eca - Blue



Item Code: 205-275

Features	Values
Outer diameter approx.	8.4 mm

## Cross-section diagram

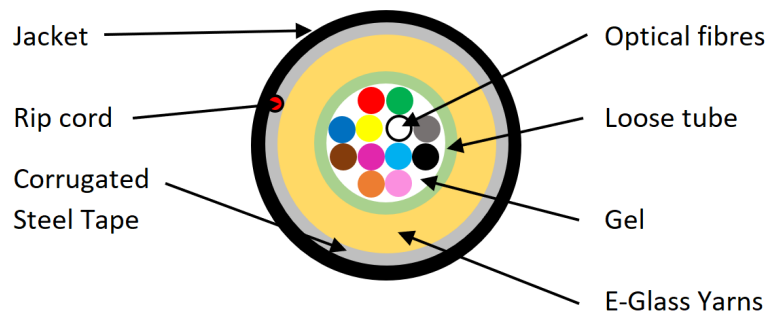

## Cable specifications

Features	Values
Fibre Colour Code Standard	TIA 598
Strength members	E-Glass Rovings
Tensile Strength (during installation)	4000N
Tensile strength (installed)	2000N
Crush (Direct Burial)	400N/cm
Temperature range (installation)	-5 to +50C
Temperature range (installed)	-30 to +70C
Temperature range (storage)	-30 to +70C
Weight	148 kg/km
Minimum bend radius (loaded)	20 x Diameter
Minimum bend radius (unloaded)	10 x Diameter
Tube diameter	4mm

# Enbeam OM2 Multimode 50/125 4 Core Armoured CST Fibre Optic Cable Loose Tube Eca - Blue

Item Code: 205-275



## Fibre specifications

Features	Values
Core diameter	50±2.5um
Cladding diameter	125.0±1.0um
Primary Coating diameter	250±15um
Max. attenuation at 850nm	2.7dB/km
Max attenuation at 1300nm	0.8dB/km
Refractive Index at 850nm	1.482
Refractive Index at 1300nm	1.477
Numerical aperture	0.200±0.015
Bandwidth at 850nm	500 MHz.km
Bandwidth at 1300nm	500 MHz.km

## Standards

Applicable Standard	Subject
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60754-2:2011	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements
IEC 60793-1-1:2017	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-2-10:2017	Sectional specification for A1 multimode fibres
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
ITU G.651.1	Characteristics of a 50/125 µm multimode graded index optical fibre cable for the optical access network
EN 50173-1:2011	Information technology. Generic cabling systems - General requirements


Continued on the next page...

# Enbeam OM2 Multimode 50/125 4 Core Armoured CST Fibre Optic Cable Loose Tube Eca - Blue

Item Code: 205-275



Applicable Standard	Subject
EN 50575: 2014 + A1: 2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ANSI/TIA/EIA 598-D	Optical Fibre Cable Colour Coding
RoHS	Restriction of Hazardous Substances - Compliant

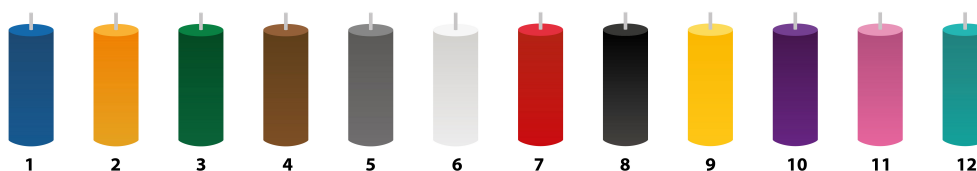

For fibre core counts above 12 the colour sequence is repeated with the addition of a mark every 70mm for cores 13-24 and two marks for 25-36 and so on.

## Part number table

Part Number	Description
205-275	Enbeam OM2 Multimode 50/125 4 Core Armoured CST Fibre Optic Cable Loose Tube Eca - Blue
205-276	Enbeam OM2 Multimode 50/125 8 Core Armoured CST Fibre Optic Cable Loose Tube Eca - Blue
205-277	Enbeam OM2 Multimode 50/125 12 Core Armoured CST Fibre Optic Cable Loose Tube Eca - Blue
205-278	Enbeam OM2 Multimode 50/125 16 Core Armoured CST Fibre Optic Cable Loose Tube Eca - Blue
205-279	Enbeam OM2 Multimode 50/125 24 Core Armoured CST Fibre Optic Cable Loose Tube Eca - Blue
275-275	Enbeam OM2 Multimode 50/125 4 Core Armoured CST Fibre Optic Cable Loose Tube Cca - Blue
275-276	Enbeam OM2 Multimode 50/125 8 Core Armoured CST Fibre Optic Cable Loose Tube Cca - Blue
275-277	Enbeam OM2 Multimode 50/125 12 Core Armoured CST Fibre Optic Cable Loose Tube Cca - Blue
275-278	Enbeam OM2 Multimode 50/125 16 Core Armoured CST Fibre Optic Cable Loose Tube Cca - Blue
275-279	Enbeam OM2 Multimode 50/125 24 Core Armoured CST Fibre Optic Cable Loose Tube Cca - Blue

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.