

# SmartLAN

## Ethernet Interface for Internet connections

The SmartLoop/LAN board connects to any Ethernet network and allows remote access (via Internet) to the control panel and to all the connected control panels in the HorNet network. The board is capable of sending detailed e-mails for each event and real-time event reports via TCP/IP. The board allows remote data upload/download operations and provides a web server for access to the control panel via web.



### Main features

- Connects to an Ethernet network.
- Sends e-mails containing system event reports.
- Sends e-mails in response to programmed events (e.g. Timer And input activation, etc.).
- Sends reports via TCP/IP.
- Remote system configuration via the Internet.
- System access via WEB browser (internet explorer).
- Compatible with all SmartLoop control panels.
- **Possibilità di avere più connessioni contemporaneamente**
- **Alloggio per SD CARD (max 2Gb) utilizzabile per l'immagazzinamento di immagini da allegare alle E-Mail.**
- **Personalizzazione pagina WEB iniziale.**

### Installation

The board comes with a connection wire and mounting supports which allow its installation on the motherboard.



### Technical specification

- Operating voltage: 24 Vdc.
- Current draw: 200 mA.
- **Sistema operativo LINUX.**
- **Scheda di rete 10/100 RJ45.**
- **Porta RS232.**
- **Porta USB per collegamento PC.**
- **LED di indicazione dell'alimentazione.**
- **LED di controllo della comunicazione con la scheda madre.**
- **LED di attività LAN.**



### ORDER CODE


**SmartLAN:** Ethernet Interface for Internet connections.

# SmartLAN/SF

## Ethernet Interface for Internet connections

The SmartLAN/SF board connects to any Ethernet network and allows remote access (via Internet) to the control panel and to all control panels present in the HorNet network.

This board also allows remote programming (upload/download operations) and remote system monitoring via the SmartLook supervisory application.

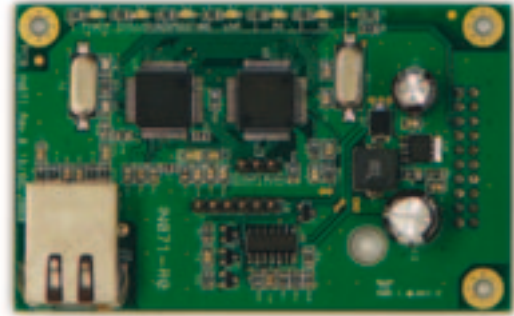


### Main features

- Connects to an Ethernet network.
- Remote system configuration via the Internet.
- Remote monitoring via the SmartLook software application.
- Compatible with all SmartLoop control panels.

### Installation

The board comes with supports which screw into the motherboard.

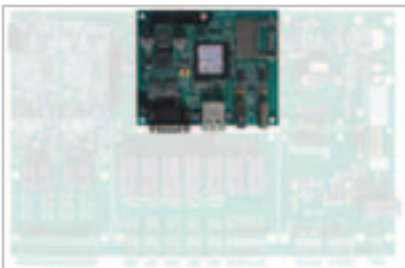

### Technical specification

- Operating voltage: 24 Vdc.
- Current draw: 200 mA.

### ORDER CODES

**SmartLAN/SF:** Ethernet Interface for Internet connections.