




**6721W**

**MINI HANDSFREE MONITOR, S2**

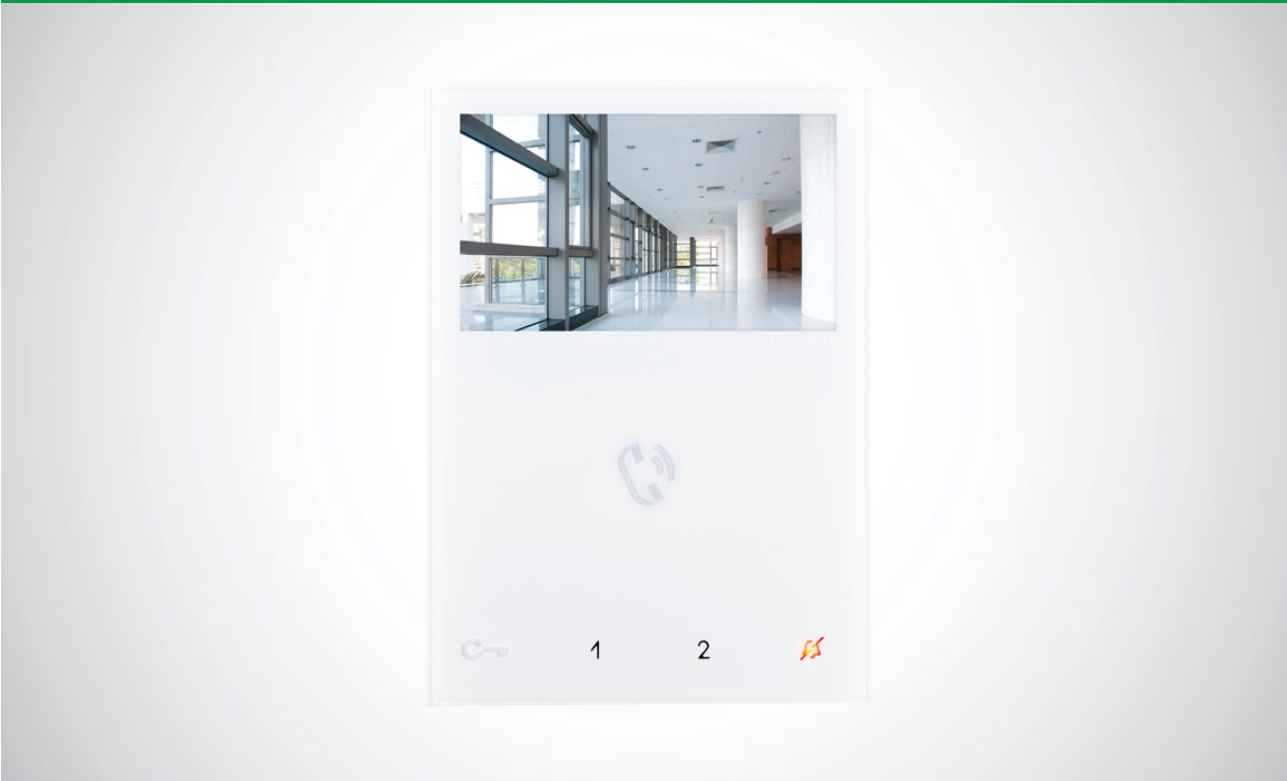

Wall-mounted hands-free monitor with full-duplex audio and 4.3" / 16:9 colour screen. Allows brightness control, plus adjustment of the ringtone volume, which can be customised by choosing one of several different melodies. Equipped as standard with 5 sensitive touch back-lit controls for audio activation, door-opening, self-ignition, switchboard call, privacy service and LED signalling for the door status. Manages floor door calls as standard. Option of adding 3 additional buttons with accessory Art. 6734W. Complete with 2 x 8-position DIP-SWITCH for user code programming and button programming. The wall-mounting or residential series box backplate and riser distribution terminal Art. 1214/2C are included. The monitor can only be used in 2-wire Simplebus2 systems. Dimensions: 115x160x22mm.

**AWARDS**





**6721W**

**MINI HANDSFREE MONITOR, S2**

**GENERAL DATA**

Product height (inch):	6.3
Product width (inch):	4.53
Product depth (inch):	0.87
Product weight (oz):	1.1
Product color:	White RAL9003
Material:	ABS
Wall mounting:	Yes
Desk base-mounted:	Yes, with a dedicated accessory

**COMPATIBLE SYSTEMS**

Audio/video Simplebus 2 with power supply art. 4888C:	Yes
Audio/video Simplebus 2 with power supply art. 1210:	Yes
Simplebus 2 audio/video kit with power supply art. 1209:	Yes

**DISPLAY FEATURES**

Size (inches):	4.3
Aspect Ratio:	16:9
Resolution (pixels):	480x272

**AUDIO FEATURES**

Type:	Hands-free
Microphone:	6mm (ø), omnidirectional
Loudspeaker:	36mm (ø), 40 ohm, 1W

**ELECTRICAL CHARACTERISTICS**

Type of power supply:	Power supply from video door entry bus
Supply voltage:	22÷34VDC (bus)
Stand-by absorption (W):	0.05
Maximum absorption (W):	8.8

**HARDWARE FEATURES**

Type of buttons:	Capacitive
Service buttons:	Lock-release, Answer, Silent (Privacy), Door open
No. of programmable buttons for additional functions:	2 (5 with accessory art. 6734W)
Terminals:	L L CFP1 CFP2
Removable terminals:	Yes

**SETTINGS**

Loudspeaker volume:	Yes
---------------------	-----

The technical specifications are subject to variations without warning.



**6721W**

**MINI HANDSFREE MONITOR, S2**

**SETTINGS**

Microphone volume:	Yes
Ringtone volume:	Yes
Screen brightness:	Yes
Screen contrast:	Yes
Screen colour:	Yes

**ENVIRONMENTAL AND COMPLIANCE FEATURES**

IP protection degree:	IP30
Operating temperature (°K):	41 ÷ 104
Operating humidity (RH max - %):	25 ÷ 75
Environmental class:	I
Compliance and Certifications:	RoHS II - 2011/65/UE (EN 50581:2012), EMC 2014/30/UE (EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011)

**MAIN FUNCTIONS**

Door opener:	Yes
Self-ignition:	Yes
Intercom calls:	Yes
Actuator control:	Yes
CPS call:	Yes
Outside door call input:	Yes
"Silent" mode (Privacy):	Yes
Door opening on call (Doctor):	Yes
Automatic answer (handsfree):	Yes
Door open signaling:	Yes
Multiple address:	Yes
Customizable ringtone:	Yes
Sending alarm calls:	Yes



6721W

## MINI HANDSFREE MONITOR, S2


### ACCESSORIES



**6711WV**

ADAPTER PLATE FOR MINI HANDSFREE

Adapter plate to finish the installation of the Mini Handsfree monitor in case of replacement of flush-mounted or wall-mounted Planux, Smart and Icona monitors. White color. Dimensions: 170x220x3 mm.



**6734W**

ADD. BUTTONS KIT HANDS-FREE MINI MONITOR, WHITE

Accessory for conversion of the monitors of the Mini series Art 6721W and 6721W/BM into 8-button versions. Includes an 8-button faceplate and an electronic module for button activation, which can be installed quickly without the need to open the monitor casing.



**6720**

Access. cables external passage for MINI HF. S2

Wall support bracket for handsfree Mini monitor allowing thru-routing of external cables.



**6732A**

DESK BASE FOR HANDS-FREE MINI MONITOR. S2

Desk base installation accessory for hands-free Mini monitor in Simplebus 2 system.