




6701W

MINI MONITOR, S2

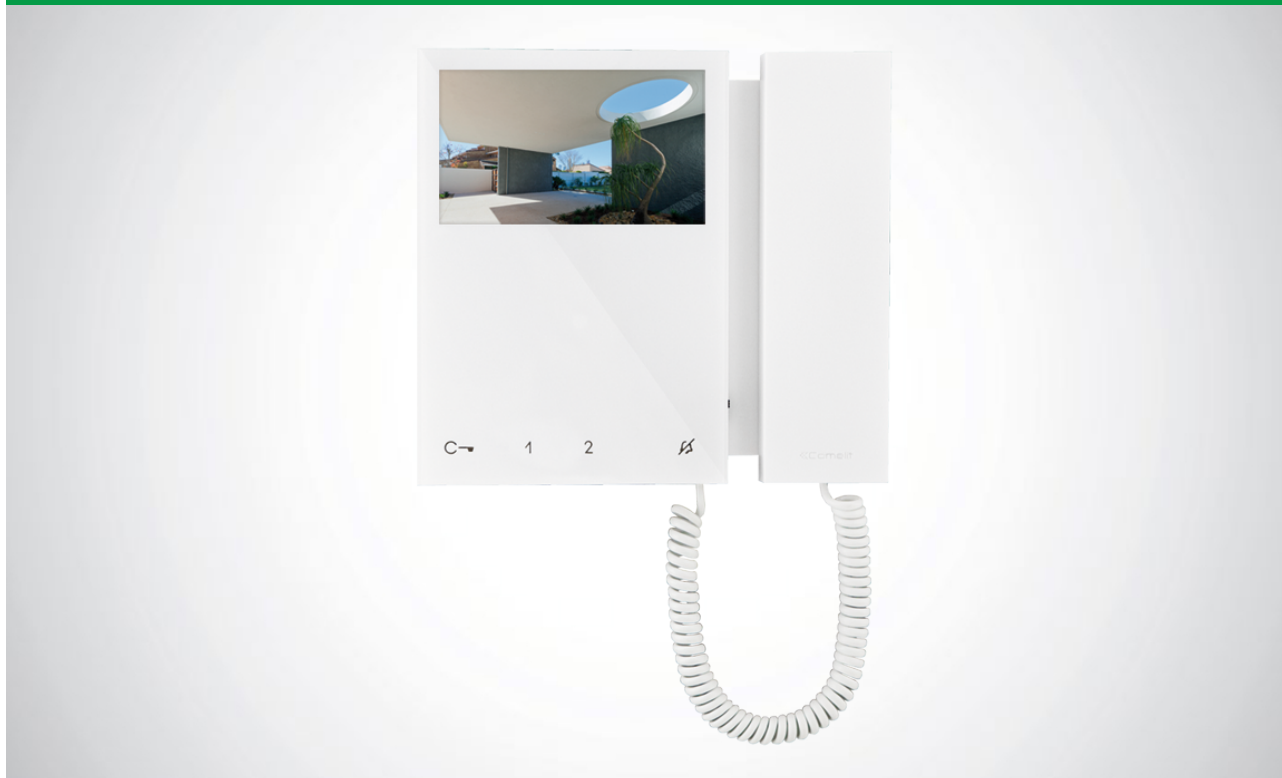

Wall-mounted colour monitor with 4.3" 16/9 screen and handset. Allows brightness and contrast control, plus adjustment of the volume of the ringtone, which can be customised with a choice of different melodies. Equipped as standard with 4 soft touch buttons for door-opening, self-ignition, switchboard call and privacy service functions and with door status indicator LEDs. Manages floor door calls as standard. Option of adding 4 additional buttons with accessory Art. 6733W. Complete with 2 x 8-position DIP-switches for user code programming and button programming. Includes wall-mounting or residential series box backplate and riser distribution terminal Art. 1214/2C. The monitor can only be used in 2-wire Simplebus2 systems. Dimensions: 175x160x22mm.

AWARDS





6701W

MINI MONITOR, S2

GENERAL DATA

Product height (inch):	6.3
Product width (inch):	6.89
Product depth (inch):	0.87
Product weight (oz):	1.32
Product color:	White RAL9003
Material:	ABS
Wall mounting:	Yes
Desk base-mounted:	Yes, with a dedicated accessory

COMPATIBLE SYSTEMS

Audio/video Simplebus 2 with power supply art. 4888C:	Yes
Audio/video Simplebus 2 with power supply art. 1210:	Yes
Simplebus 2 audio/video kit with power supply art. 1209:	Yes

DISPLAY FEATURES

Size (inches):	4.3
Aspect Ratio:	16:9
Resolution (pixels):	480x272

AUDIO FEATURES

Type:	Handset
Microphone:	6mm (ø), omnidirectional
Loudspeaker:	40 (ø) x 5.1 (H) mm, 100 ohm, 0.25W

ELECTRICAL CHARACTERISTICS

Type of power supply:	Power supply from video door entry bus
Supply voltage:	22÷34VDC (bus)
Maximum absorption (W):	5.4

HARDWARE FEATURES

Type of buttons:	Capacitive
Service buttons:	Lock-release, Silent (Privacy), Door open
No. of programmable buttons for additional functions:	2 (6 with accessory art. 6733W)
Terminals:	L L CFP1 CFP2
Removable terminals:	Yes

SETTINGS

Ringtone volume:	Yes
------------------	-----



6701W

MINI MONITOR, S2

SETTINGS

Screen brightness:	Yes
Screen colour:	Yes

ENVIRONMENTAL AND COMPLIANCE FEATURES

IP protection degree:	IP30
Operating temperature (°K):	41 ÷ 104
Operating humidity (RH max - %):	25 ÷ 75
Environmental class:	I
Compliance and Certifications:	RoHS II - 2011/65/UE (EN 50581:2012), EMC 2014/30/UE (EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011)

MAIN FUNCTIONS


Door opener:	Yes
Self-ignition:	Yes
Intercom calls:	Yes
Actuator control:	Yes
CPS call:	Yes
Outside door call input:	Yes
"Silent" mode (Privacy):	Yes
Door opening on call (Doctor):	Yes
Door open signaling:	Yes
Multiple address:	Yes
Customizable ringtone:	Yes
Sending alarm calls:	Yes



6701W

MINI MONITOR, S2

ACCESSORIES



6711W

ADAPTER PLAQUE FOR MINI MONITOR W/ HANDSET. WHITE.


Mounting accessory for Mini Monitor when replacing Magis or Genius door entry monitors. Complete with backplate art. 6710 and distribution terminal art. 1214/2C. White. Dimensions: 300x270x3 mm.



6711WS

MINI HANDSET SMALL ADAPTER PLAQUE

Mounting accessory for Mini Monitor when replacing Magis or Genius door entry monitors. White. Dimensions: 230x220x3mm.



6733W

ADDITIONAL BUTTONS KIT FOR MINI MONITOR, WHITE

Accessory for transforming MINI monitors Art 6700W-/BM and 6701W-/BM into versions with 8 buttons. Includes an 8-button faceplate and an electronic module for activating the buttons, which can be installed quickly without opening up the monitor.



6719W

Access. cables external passage for MINI HS. S2

Wall support bracket for Mini monitor with handset allowing thru-routing of external cables.



6712A

Desk base for Mini S2 monitor with handset

Desk base installation accessory for Mini monitor with handset in Simplebus 2 system.