

# TSU 700/30 PP

## 30W WALL MOUNT COLUMN LOUDSPEAKER

The TSU 700/30 PP column loudspeaker for voice evacuation systems is a 30W loudspeaker that combines elegant design with a sturdy powder-paint coated aluminium structure comprising two speakers, a ceramic terminal block and a thermal fuse. With IP65 protection class, this device is ideal for installation indoors, in places such as hotels, conference rooms and administrative buildings, but above all in semi-outdoor environments such as airports and railway stations, thanks to its technical characteristics which guarantee excellent sound propagation (reproduction of voice alarms and background music). EN54-24 certified.



### — TECHNICAL SPECIFICATIONS

#### Main features

- Six 3" speakers
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Wall mounting
- Internal selector to adjust the output power to 30 / 15 / 7.5 W
- Gray colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified

#### Electrical specifications


Power (PHC)	30 / 15 / 7.5 W (internal selector)
SPL (Sound Pressure Level)	106 dB (1W @ 1m)
Frequency response	120 Hz – 13.300 KHz (-10 dB)
Operating voltage	70 – 100 Vrms

#### Mechanical specifications

IP protection grade (according to EN54-24 / IP Rating)	44/65
Enclosure material	Aluminium
Dimensions	700 x 100 x 92 mm
Weight	3.7 Kg
Colour	Grey RAL 9006
Mounting type	Wall mount



## Dimensions

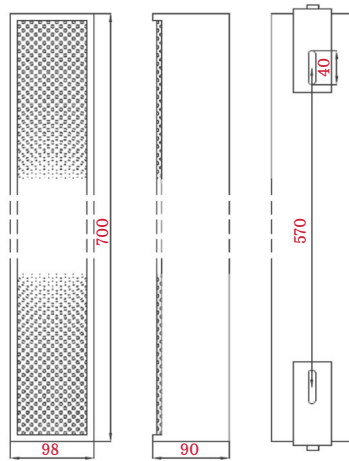

## — ORDER CODE

**TSU 700/30 PP** 30W wall mount column loudspeaker



Centobuchi, via Dei Lavoratori 10  
63076, Monteprandone (AP), ITALY  
Tel. +39 0735 705007 \_ Fax +39 0735 704912

info@inim.biz \_ [www.inim.biz](http://www.inim.biz)

Inim distributor's stamp  
and signature